

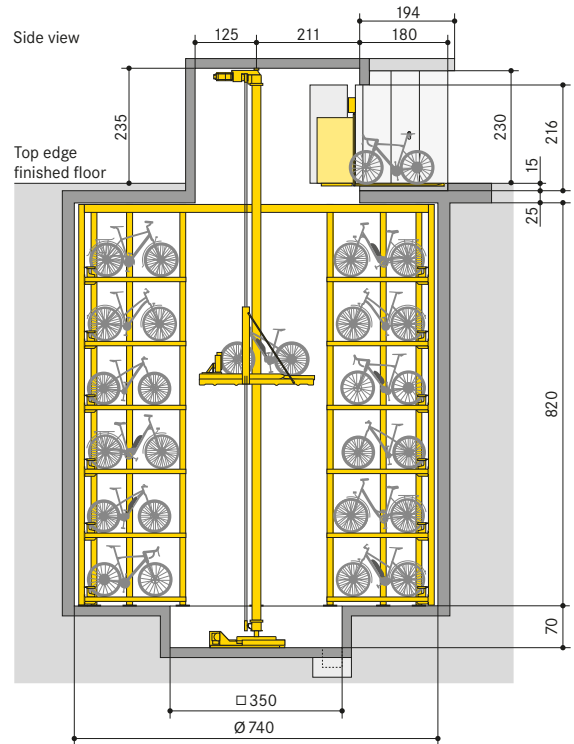


■ WÖHR Bikesafe 885/16 (96 parking places), handlebar width 76 cm

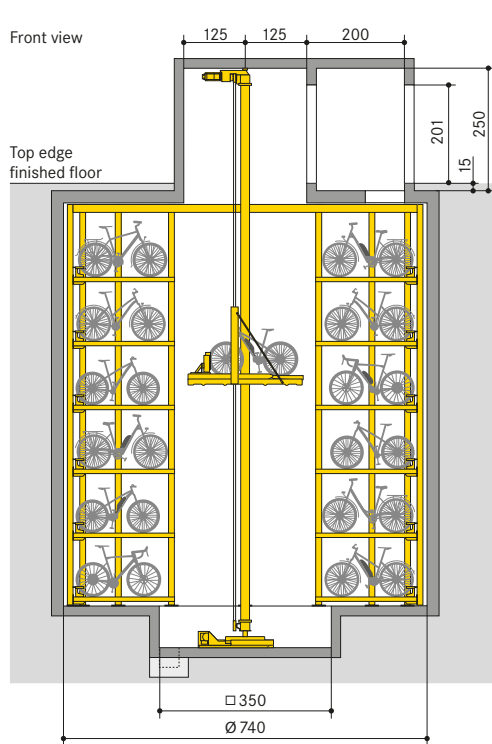


Note: if possible, provide an access door in the shaft area.



Section parking level

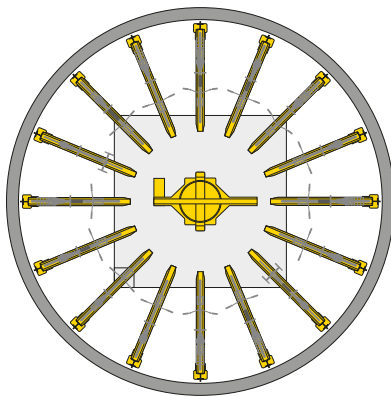

Section entrance level

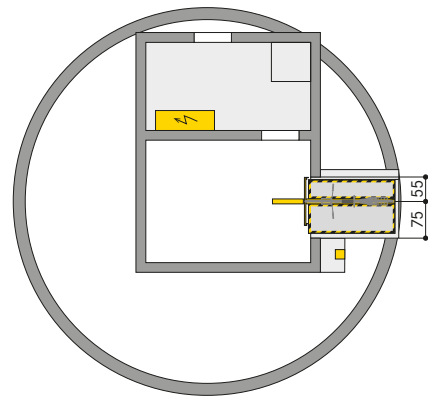


■ WÖHR Bikesafe 885/16 (96 parking places), handlebar width 83 cm

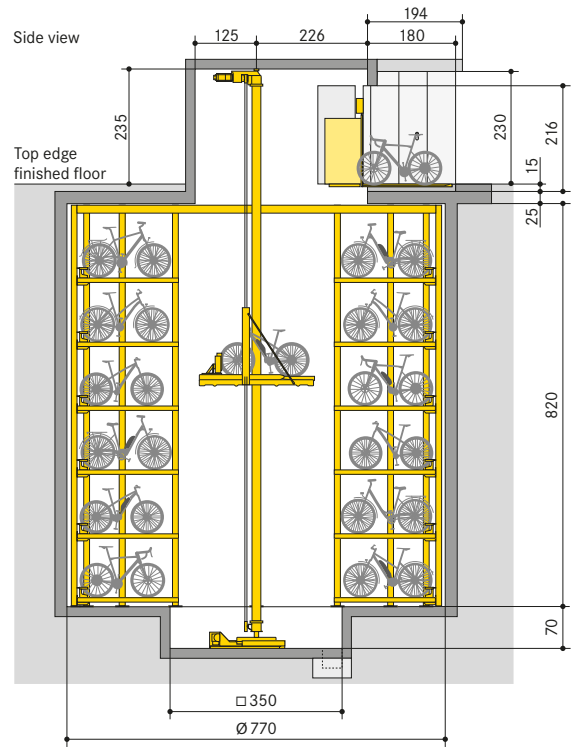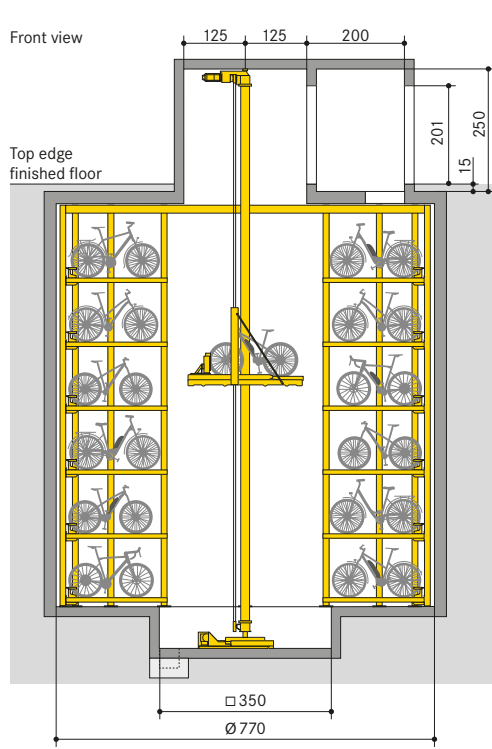


Note: if possible, provide an access door in the shaft area.



Section parking level

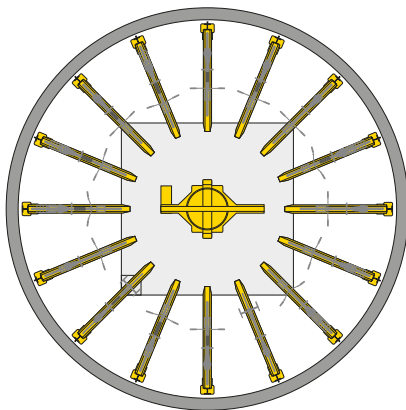

Section entrance level

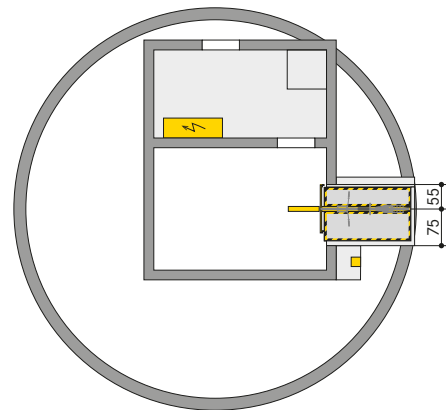


■ WÖHR Bikesafe 885/20 (120 parking places), handlebar width 76 cm

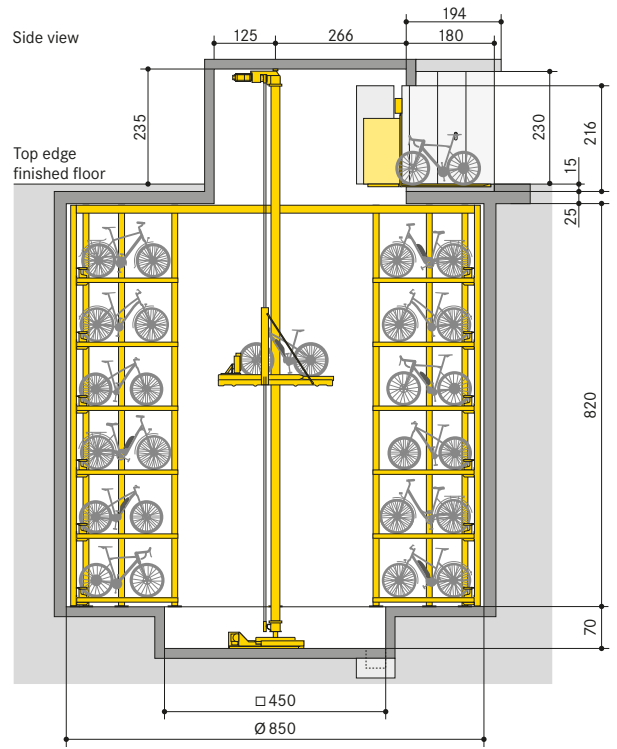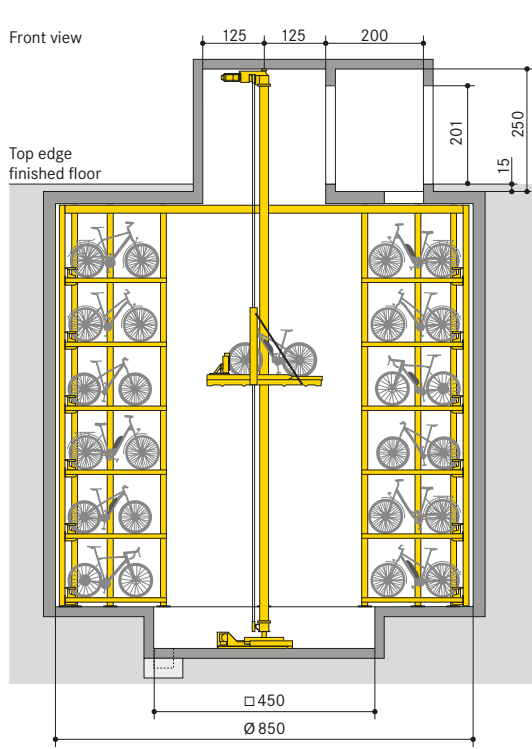


Note: if possible, provide an access door in the shaft area.



Section parking level

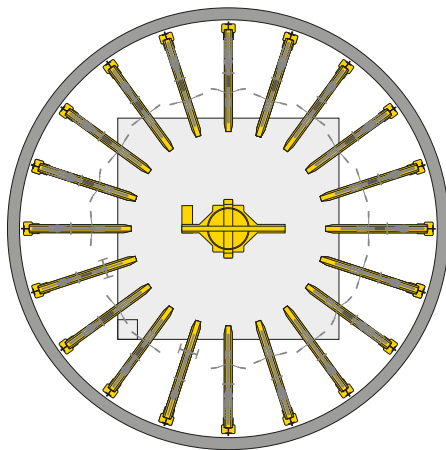

Section entrance level

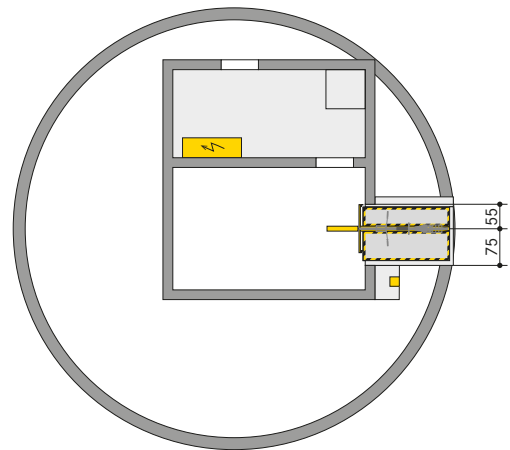


■ WÖHR Bikesafe 885/20 (120 parking places), handlebar width 83 cm

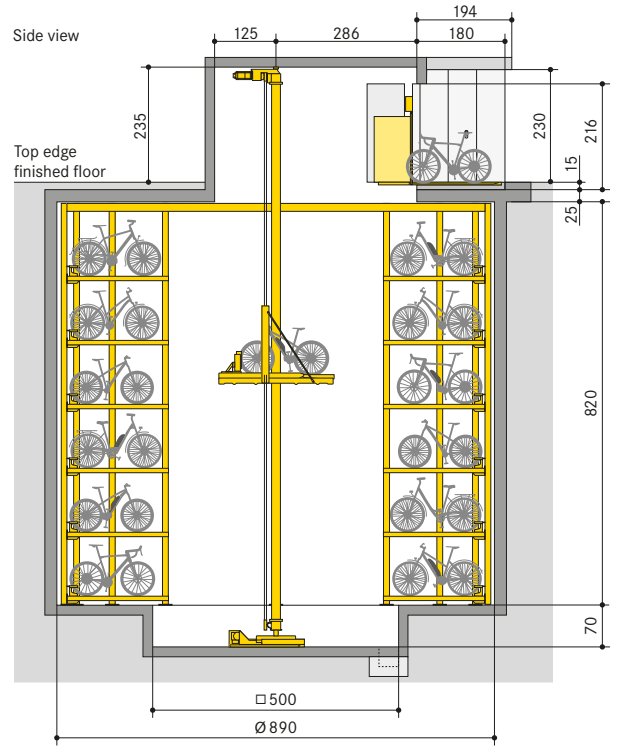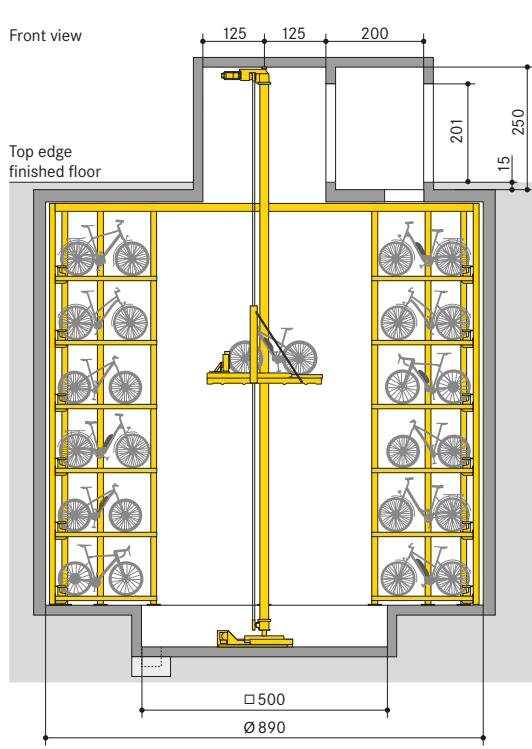


Note: if possible, provide an access door in the shaft area.


Section parking level

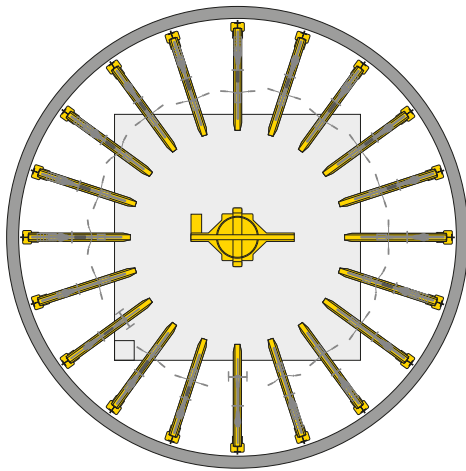


Section entrance level

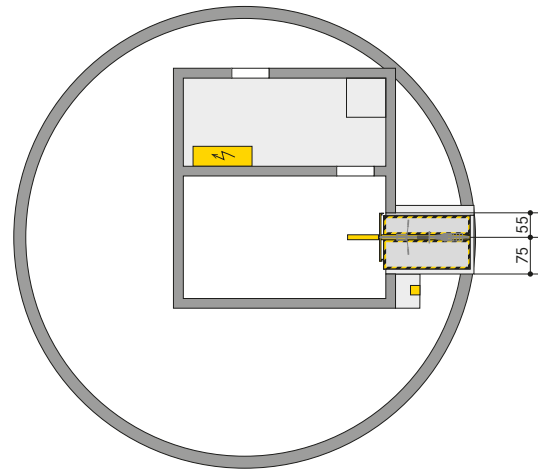


■ WÖHR Bikesafe 885/24 (144 parking places), handlebar width 76 cm

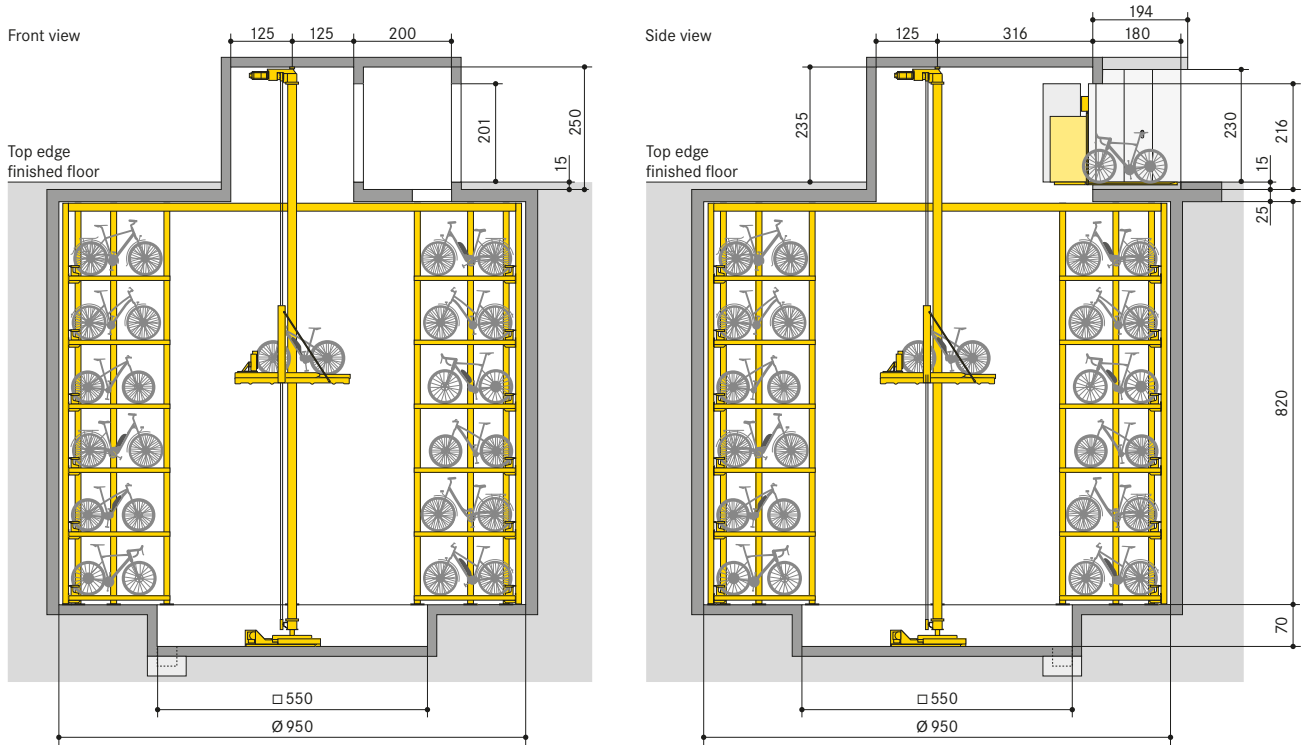

Note: if possible, provide an access door in the shaft area.

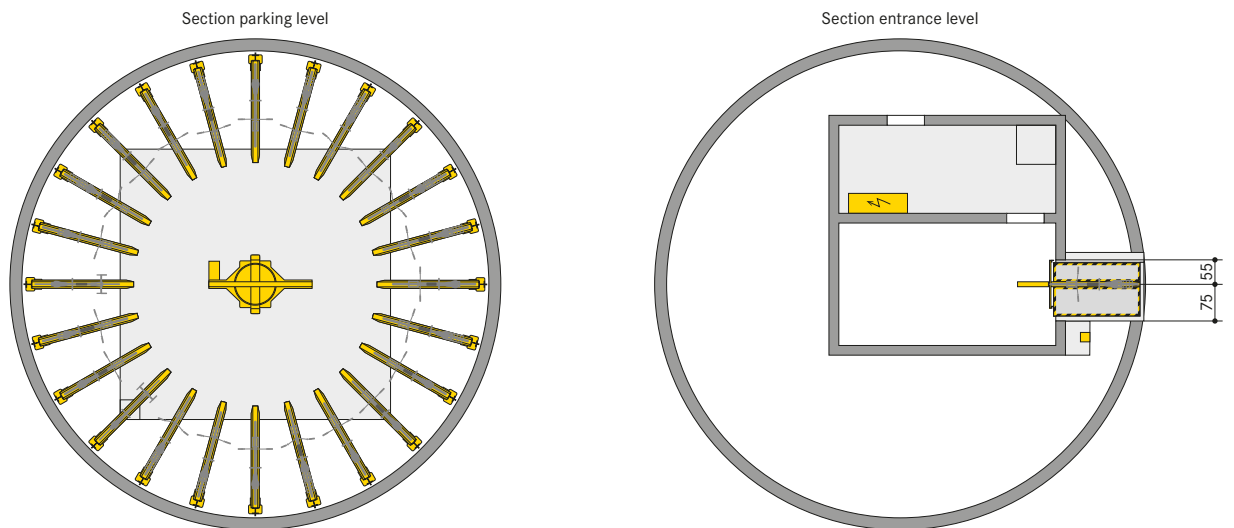

■ WÖHR Bikesafe 885/24 (144 parking places), handlebar width 83 cm

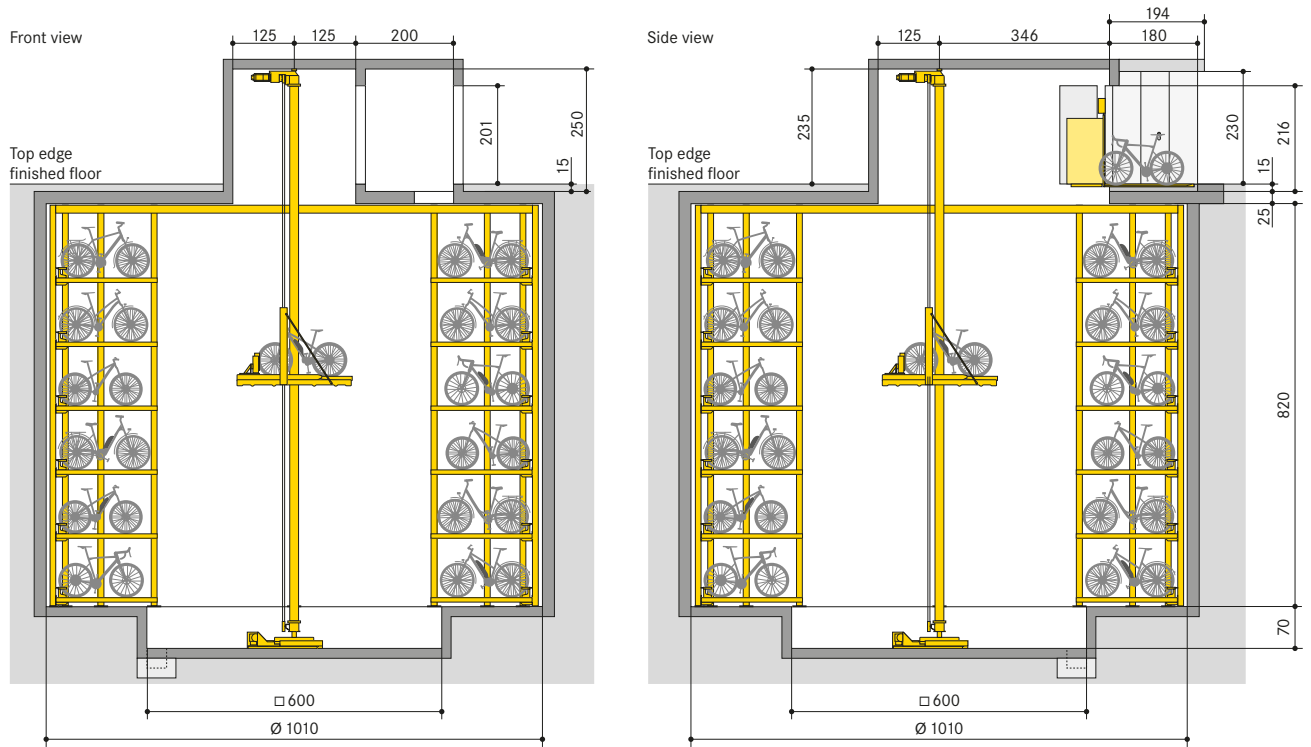

Note: if possible, provide an access door in the shaft area.



■ Dimensions

- all dimensions are minimum, finished dimensions
- tolerances must be taken into consideration
- all dimensions are given in cm